

PRESSURE TRANSMITTERS MESSTECH FR-300 SERIES



1. INTRODUCTION

This series of pressure transmitters with flush diaphragm has been developed to cover the majority of industrial applications. They are usual those ones that are dedicated to the continuous measurement of gases or liquids, mechanical engineering, hydraulics, pneumatic, etc.

The transmitter is made of with the most novel techniques and it has inside of it a converter circuit of high quality.

This whole range of transmitters can be adapted to our program of cooling towers for high process temperatures applications and for the whole range of diaphragms for the chemical industry, food industry, pharmaceutical, etc.

2. USED TECHNIQUE:

The sensor of the pressure transmitter is made of ceramic, and the technique used to make it is called "piezoresistive". This technology is related to the deformation of the diaphragm, in it there are recorded 4 electric resistences making a Wheastone bridge. Because of that any deformation that the diaphragm can suffer caused by the effect of any pressure will unbalance the electric circuit that will conform an exit sign proportional and linearity to the pressure that supports the ceramic sensor.

The ceramic sensors used are internally compensated in temperature through resistences PTC.

3. PRESSURE RANGES (Bar)

Ranges	0,25	0,30	0,50	0,75	1,00	1,25	1,50	1,75
Burst pressure	2,10	2,10	2,10	2,10	3,20	3,20	3,20	5,00

Ranges	2,00	2,50	4,00	6,00	10,0	16,0	25,0	40,0
Burst pressure	5,00	12,0	12,0	20,0	32,0	50,0	120	120

Other pressure ranges and units are available (m.c.a., PSI, Kg/cm², mmHg, KPa, etc.)


This publication does not try to establish the bases of a contract and the company keeps the right to modify without previous notice the design and the specifications of the instruments, in accordance with his politics of continued development.

4. TECHNICAL DATA

Pressure	Relative, absolute and vacuum
Pressure ranges	0-0,250 Bar a 0-250 Bar (for relative pressures) Pressure of vacuum and absolute (order pressure ranges and units are available)
Sensor	Ceramic piezoresistor
Accuracy – Combined error (hysteresis-linearity-reproducibility)	Typical $\leq 0,4$ % of span
Resolution of sensor	0,01 at 0,014 % of span
Response time	≤ 1 msec.
Dielectric strength	2 KV
Materials wetted parts	Stainless steel AISI-316L, ceramic and o-ring
Material of the O-ring	Acrilnitrilo butadieno (NBR) (other materials: VITON, EPDM, PTFE, etc.)
Material case	Stainless steel
Process connection	1 1/4 BSP
Degree of protection	IP-65
Signal output	Linearity
Power supply	8+35 Vdc.
Wiring protection	Protected against reverse polarity, overvoltage and short circuiting
Signal output	4+20 mAdc., 2 wire (other output can be adapted)
Maximum load R - Ω	$R_a \leq [U_b (Vdc.) - 8 (Vdc)] / 0,02 Adc.$
Electrical connection	4 pin connector Din 43650 EN60529 - PG-9.
Temperature	Process -5 a +90 °C Ambient -5 a +80 °C
Dimensions	See drawings
Weight	<0,525 Kg. (with parking box and instructions)
CE - Conformity	89/336/CE-EN61000-6-2-97/23


5. DIMENSIONS (mm.)

Dimensions case – Process connection

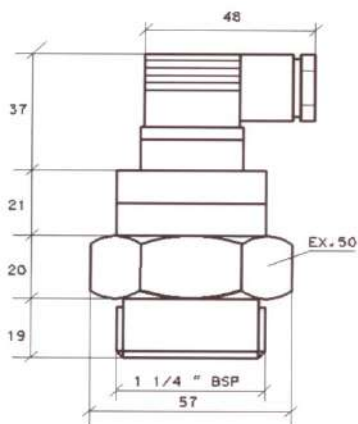


6. ELECTRICAL CONNECTION


6.1 With switching power supply

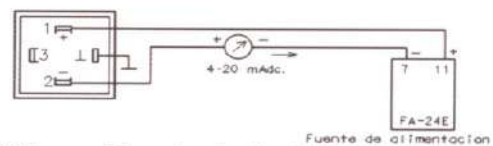

6.2 With amplifier relay for the transmitter

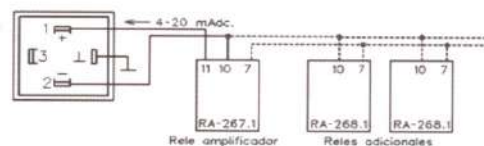

6.3 With panel meters – Process display

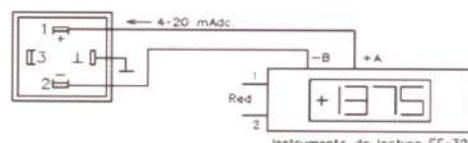

This publication does not try to establish the bases of a contract and the company keeps the right to modify without previous notice the design and the specifications of the instruments, in accordance with his politics of continued development.